
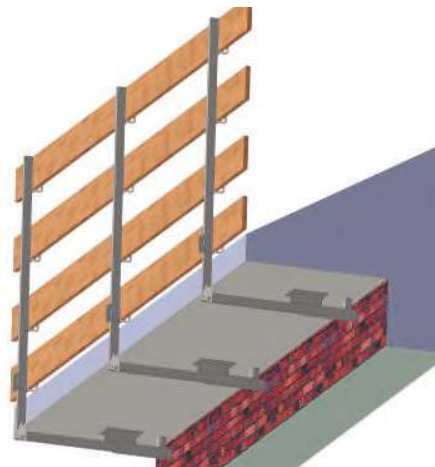


## FLEX B- 27100

Adjustable edge protection for roof.

The fixing of the system is done by means of dowels below or under the ledge. The post is tilted in relation to the base to be set in the position closest to the vertical (and in any case within a deviation of  $\pm 15^\circ$  accepted by the EN 13374 standard). The lower support for the toe board is slidable to adapt to any extent in relation to the installation.

Certified in accordance to EN 13374:2013 class A and class B.

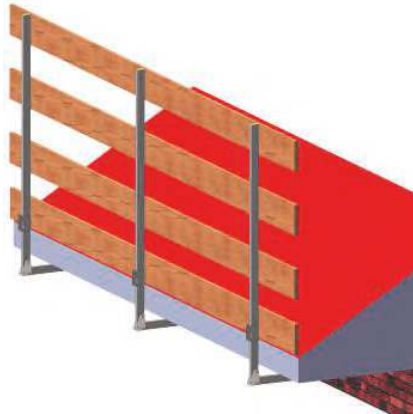

DETAILS	
REF.	B-27100
FIXING	bolts height: 170 cm, length: 90 cm
USEFUL HEIGHT	cm
CLAMP OPENING	-
WEIGHT	13 kg
STANDARD	EN 13374 A, B
MAX. SPACING	150 cm
FINISHING	Cold galvanised