




## FLEX B- 2744

Wall preserving edge protection with under tile bracket.

This device is installed by fixing a special plate with bolts onto the roof, next to the gutter. The post is then hooked to this anchorage without piercing the facade. The lower part of the post rests against the exterior wall of the building. Particularly suitable for restorations and roof renovation. This system can replace the scaffolding in a more convenient way. The lower support is sliding in order to adapt to any size of installation.

With 3 available plate sizes: 30cm, 60 and 90 cm.

Certified in accordance to EN 13374:2013 class A and class B.

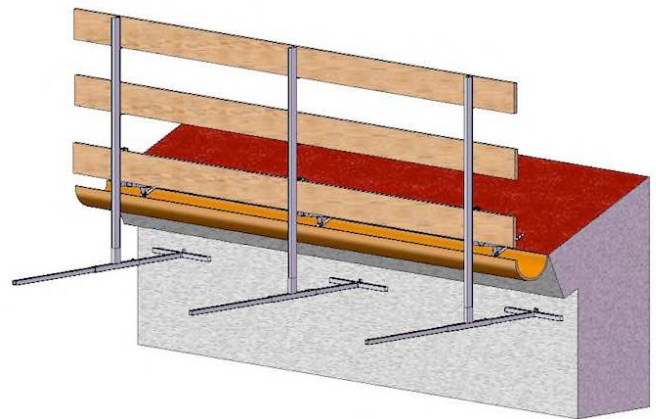

DETAILS	
REF.	B-2744
FIXING	Plate + bolts
USEFUL HEIGHT	110 cm
CLAMP OPENING	-
WEIGHT	9 kg
STANDARD	EN 13374:2013 A, B
MAX. SPACING	160 cm
FINISHING	Cold galvanized